



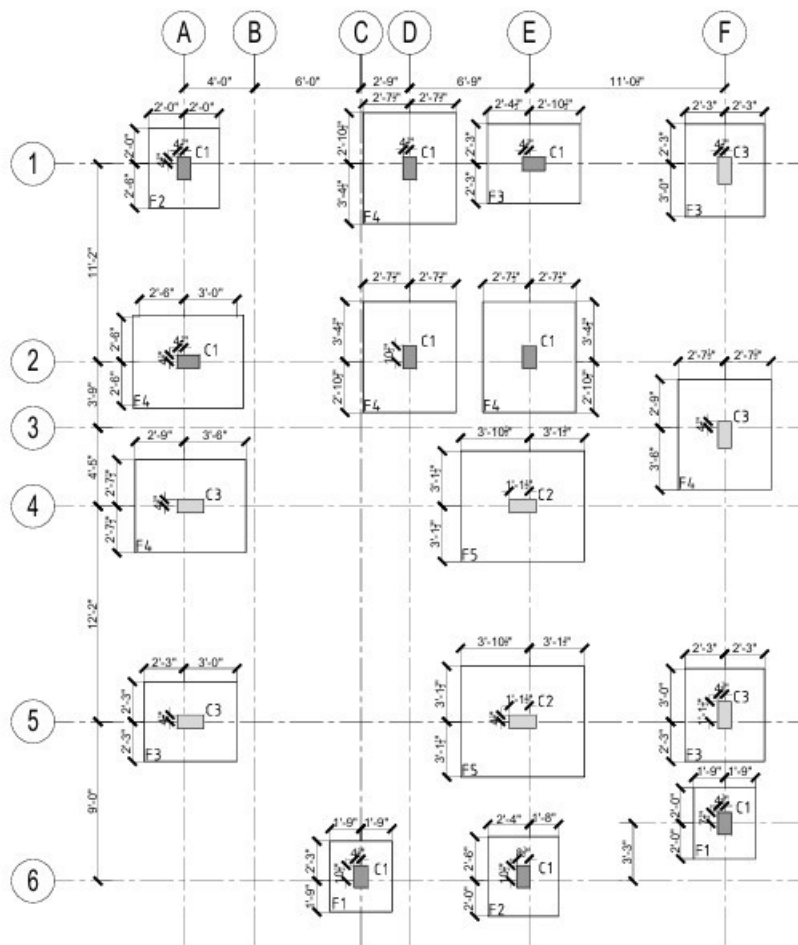


1 FOUNDATION PLAN
SCALE 1:100

NOTE: 1. ALL FOOTINGS ARE CENTRALLY PLACED W.R.T COLUMNS (U.N.O.)
2. FOR EXCAVATION CONSIDER 4" OFFSET ON EITHER SIDES.

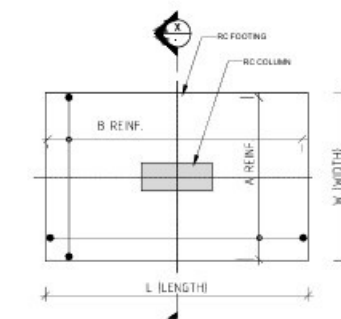

2 TYPICAL PLAN OF FOOTING
SCALE 1:25
(FOR DIMENSIONS REFER TO FOOTING SCHEDULE)

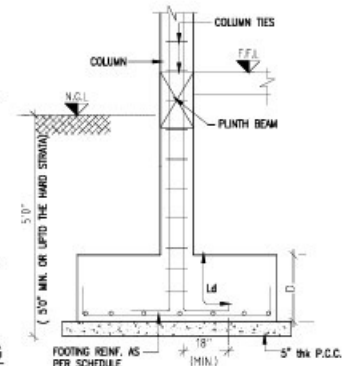

3 SECTION X
SCALE 1:25

SCHEDULE OF COLUMNS

GRADE OF CONCRETE M20 GRADE OF STEEL Fe 500	FOUNDATION TO ROOF LVL.		
	COLUMN - C1	COLUMN - C2	COLUMN - C3
	MAIN BARS: 15ϕ12 TIES: 15ϕ8	MAIN BARS: 18ϕ12 TIES: 18ϕ8	MAIN BARS: 18ϕ12 TIES: 18ϕ8

SCHEDULE OF FOOTINGS

FOOTING MARK	SIZE			BOTTOM REINFORCEMENT	
	LENGTH (L)	WIDTH (W)	DEPTH (D)	A	B
F1	4' 0"	3' 6"	15"	Y10 @ 6"	Y10 @ 6"
F2	4' 6"	4' 0"	15"	Y10 @ 6"	Y10 @ 6"
F3	5' 3"	4' 6"	15"	Y10 @ 6"	Y10 @ 6"
F4	6' 3"	5' 3"	15"	Y10 @ 6"	Y10 @ 6"
F5	7' 0"	6' 3"	18"	Y10 @ 5"	Y10 @ 5"

NOTES:

- GRADE OF CONCRETE SHALL BE M20 FOR ALL R.C.C WORKS.
- T/Y DENOTES HYSD TMT BARS OF GRADE Fe 500 CONFORMING TO IS 1786:2008.
- LAP LENGTH SHALL BE 50 TIMES DIA OF THE BAR AND TO BE STAGGERED SUCH THAT NOT MORE THAN 50% OF THE BARS ARE LAPPED AT A SECTION.
- CLEAR COVER TO THE REINFORCEMENT :
FOOTING/WALL : 50 mm
COLUMNS : 40 mm
SLAB : 20 mm
BEAM : 25 mm
- DEVELOPMENT LENGTH SHALL BE 50 TIMES THE DIA. OF THE BAR.
- S.B.C OF SOIL CONSIDERED IS 18 T/m².
- STRUCTURE IS DESIGNED FOR G+1 STOREY.